


主要技术特性		KEY PERFORMANCE			
温度范围 Temperature range		-65~+165℃	绝缘电阻 Insulation resistance		≥ 5000MΩ
特性阻抗 Characteristic Impedance		50 Ω	介质耐压 Dielectric Withstanding voltage		1000V
频率范围 Frequency range	配软电缆 With flexible cable	0~12.4GHz	接触电阻 Contact resistance	中心导体 Center conductor	≤ 0.003 Ω
	配半刚、半柔性电缆 With semi-rigid/flexible cable	0~18GHz		外导体 Outer conductor	≤ 0.002 Ω
电压驻波比 VSWR	配软电缆 With flexible cable	≤ 1.15+0.02F	寿命 Durability		500Cycles
	配半刚、半柔性电缆 With semi-rigid/flexible cable	≤ 1.10+0.02F			

头部配合尺寸 INTERFACE MATING DIMENSIONS

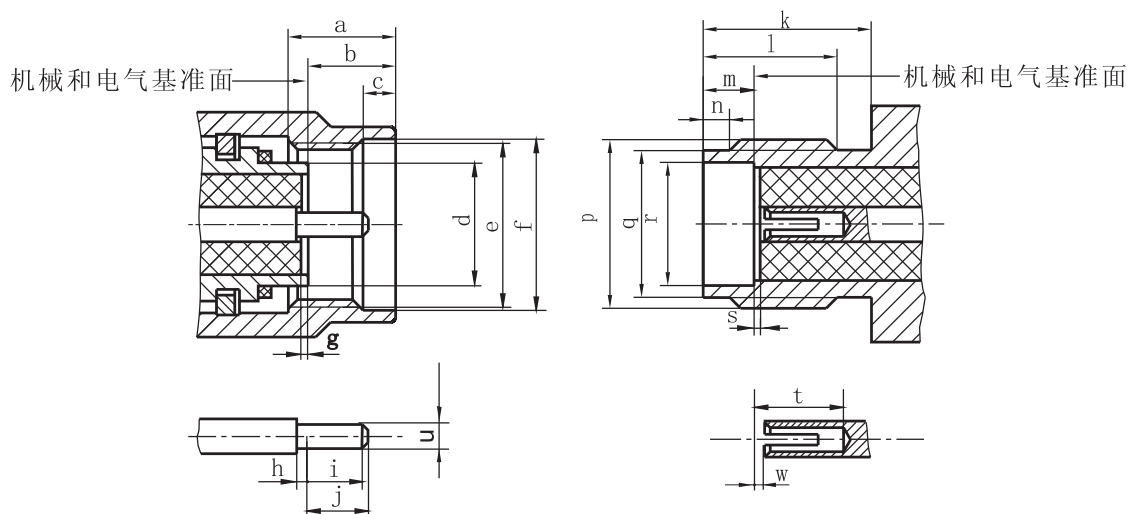

Symbol	MIN(mm)	MAX(mm)	Symbol	MIN(mm)	MAX(mm)	Symbol	MIN(mm)	MAX(mm)
a	3.30	—	h	0	0.25	p	1/4-36UNS-2A	
b	—	3.43	i	1.27	—	q	Φ5.28	Φ5.49
c	0.38	1.14	j	—	2.54	r	Φ4.597	Φ4.670
d	Φ4.340	Φ4.592	k	5.54	—	s	0	0.1
e	1/4-36UNS-2B		l	4.32	—	t	2.92	—
f	Φ6.35	Φ6.73	m	1.88	1.98	u	Φ0.90	Φ0.94
g	0	0.1	n	0.38	1.14	w	0	0.76