

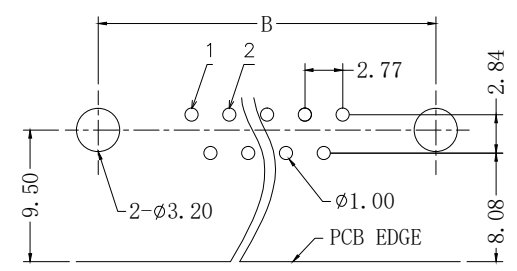
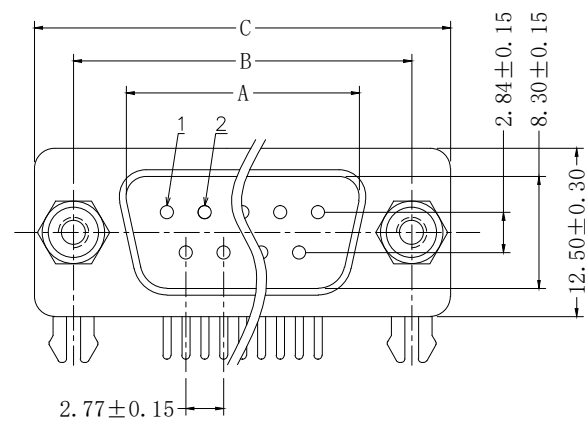


版次	变更内容	审核	日期

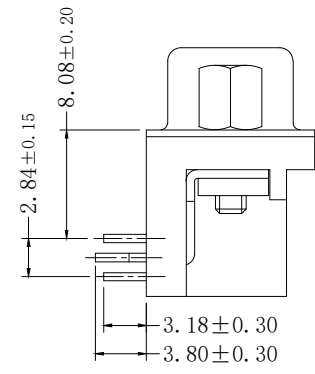


PC. BOARD LAYOUT
GENERAL TOLERANCE: ±0.05

NUMBER OF CONTACTS	A	B	C
	±0.25	±0.25	±0.35
9	16.90	25.00	30.80
15	25.25	33.30	39.20
25	39.00	47.05	53.05
37	55.40	63.50	69.40

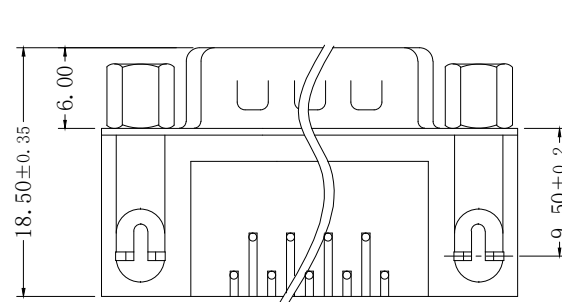

- DMR-xx M G-C B-3-B
- 芯数: 09, 15, 25, 37
 - 极性: M: 公(针)
 - 电镀规格: S: 接触区镀金Gold Flash, 其它部分镀锡; G: 全镀金Gold Flash, 3G: 全镀金3u"
 - 螺柱长度: A: 光孔, B: 无螺柱有螺纹, C: 4.8mm, D: 5.8mm
 - 外壳材质: B: 不锈钢, 缺省: 铁
 - 塑胶颜色: 2: 蓝色, 3: 黑色
 - 螺柱位置: A: 无, B: 前固定

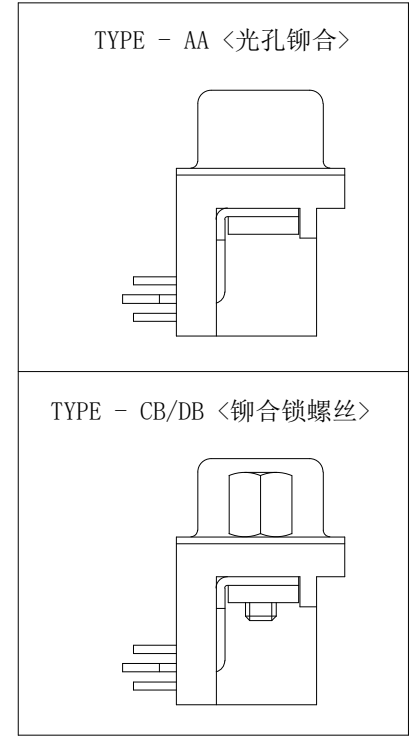

材料(MATERIALS):

- 端子(Contacts): 黄铜 (Brass)
- 端子电镀(Contact plating): 详见料号说明(See number description)
- 绝缘体(Insulator): PBT+G.F, UL94V-0
- 外壳(Shell): 铁材 or 不锈钢(Steel or Stainless steel)

电气说明(ELECTRICAL SPECIFICATION):

- 额定电流(Current Rating): 5 Amperes
- 额定电压(Dielectric Withstanding Voltage): AC 1000/60ses. r. m. s.
- 绝缘电阻(Insulation Resistance): 1000 MΩ Min. at DC 500V
- 接触电阻(Contact Resistance): 25 mΩ Max.
- 使用温度(Operating Temperature): -20°C~+105°C

公差:	版次:	A	上海宗进电子科技有限公司 Shanghai Zong Jin Electron Technology Co.LTD			
. X ±0.35	比例:		型号:	DMR-xxMX-XX-X-X	签名	日期
. XX ±0.25	单位:	mm	描述:	D型连接器	绘图:	
. XXX ±2°	页码:	1/1	图号:		确认:	
LNLB					审核:	